

BPSE24V40ART2U/BPSE48V40ART2U
BPSE72V40ART2U

EXTENDED BATTERY MODULE TO PROLONG RUNTIME

The battery module ensures extended system runtime during power outages


Designed for data center and critical applications, the Extended Battery Module (EBM) Series can be used in conjunction with compatible UPS systems to provide prolonged system runtime during power interruption. The battery modules come with DC plug-and-play power connectors to allow for adding multiple EBMs. The sealed lead-acid batteries used within the EBMs are stable and safe, which ensure the power system's reliable performance.

SERIES FEATURES

- Rack/Tower Convertible Configurations
- Sealed Lead-acid Batteries
- User-replaceable Batteries
- EBM Expansion Capability
- Metal Housing

PRODUCT CALLOUTS

- 1 . On-board Replaceable Fuse Cover
- 2 . Automatic Detection of EBM Connector
- 3 . Input Connector
- 4 . Output Connector

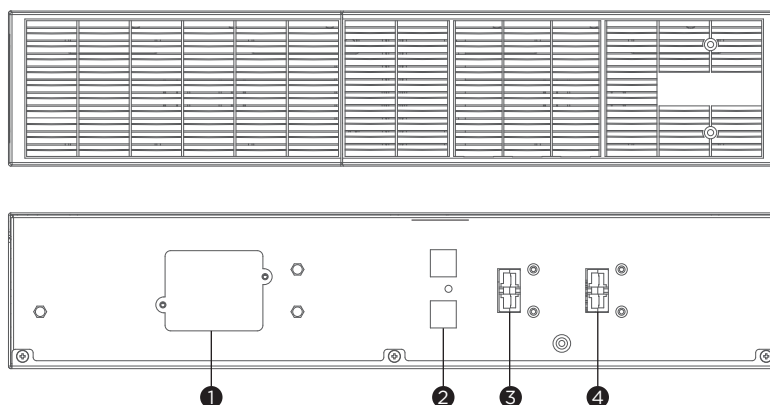

BPSE24V40ART2U/BPSE48V40ART2U/BPSE72V40ART2U



TECHNICAL SPECIFICATIONS

Model Name	BPSE24V40ART2U	BPSE48V40ART2U	BPSE72V40ART2U
General			
Nominal Output Voltage (Vdc)	24	48	72
Rated Output Current (A)	40		
Battery			
Battery Type	Sealed Lead-acid		
Built-in Charger	No		
Typical Recharge Time (Hours)	Depends on Connected UPS		
User-replaceable	Yes		
Expansion Ready	Yes		
Replacement Battery Pack	RBP0156	RBP0157	RBP0155
Replacement Battery Pack Quantity (pcs)	2		
Compatible UPS	OLS1000ERT2UA	OLS2000ERT2UA	OLS3000ERT2UA
Physical			
Form Factor	Rackmount, Tower		
Physical Size			
Dimensions (WxHxD) (mm.)	438 x 88 x 430		438 x 88 x 610
Weight (kg.)	16.24	26.74	38.75
Installed Rack Height (U)	2		
Environmental			
Operating Temperature (°C)	0 - 40		
Operating Relative Humidity (Non-condensing) (%)	0 - 90		
Certifications			
Certifications*	CE, EAC		
RoHS	Yes		

*Certifications may vary according to different regions. Visit www.cyberpower.com for more information.
#All specifications are subject to change without notice.

